


CARBON & ALLOY GEOMETRY

Geometry shown for Slack, Neutral, and Steep RIDE-9™ positions.

Travel: 140mm / 140mm

- HTA** Head Tube Angle (deg)
- STA** Seat Tube Angle (deg)
- STL** Seat Tube Length (mm)
- TTH** Top Tube Horizontal (mm)
- HTL** Head Tube Length (mm)
- RC** Rear Centre (mm)
- BBD** Bottom Bracket Drop (mm)
- SH** Standover Height (mm)
- WB** Wheelbase (mm)
- R** Reach (mm)
- S** Stack (mm)

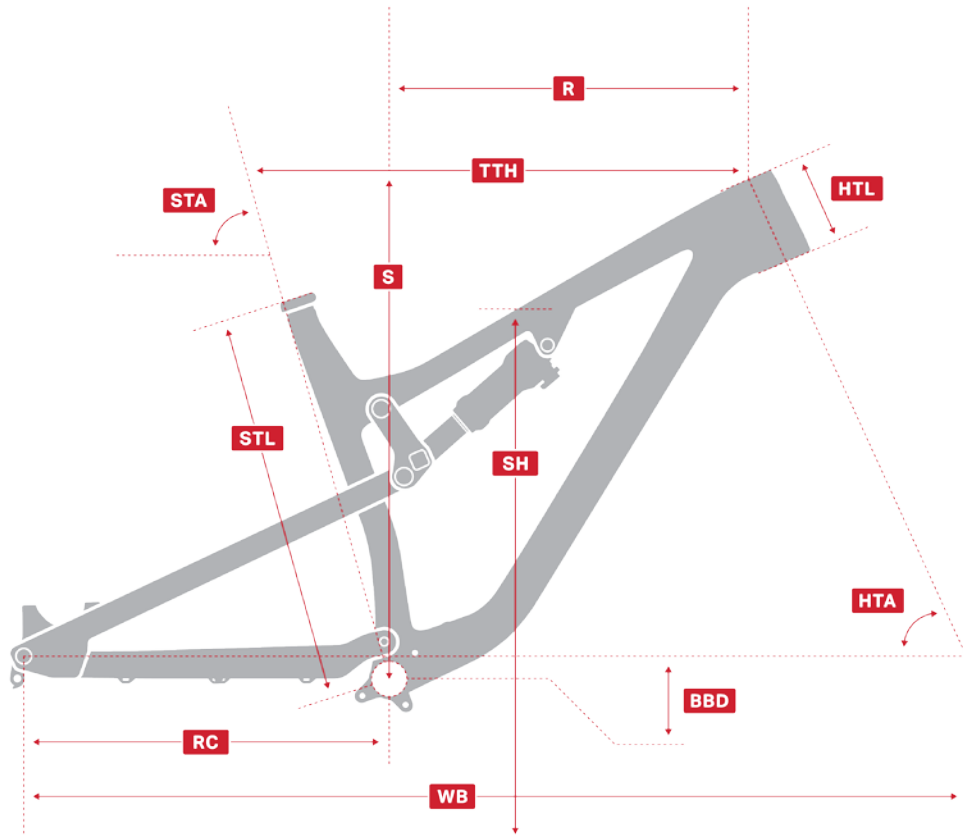


	SM			MD			LG			XL		
	Slack	Neutral	Steep	Slack	Neutral	Steep	Slack	Neutral	Steep	Slack	Neutral	Steep
HTA	66°	66.5°	67°	66°	66.5°	67°	66°	66.5°	67°	66°	66.5°	67°
STA	74.5°	75°	75.5°	74.5°	75°	75.5°	74.5°	75°	75.5°	74.5°	75°	75.5°
STL	392	392	392	432	432	432	470	470	470	508	508	508
TTH	576	575	574	601	600	599	626	625	624	656	655	654
HTL	95	95	95	100	100	100	110	110	110	120	120	120
RC	436	435	434	436	435	434	436	435	434	436	435	434
BBD	36	30	23	36	30	23	37	30	23	37	30	23
SH	816	818	820	811	814	816	810	813	815	809	812	815
WB	1154	1154	1153	1179	1179	1178	1206	1206	1205	1237	1237	1236
R	408	413	419	432	437	443	455	460	465	482	487	493
S	607	603	599	611	608	604	621	617	613	630	626	622

BC EDITION GEOMETRY

BC Edition features a dedicated link delivering 155mm of travel and fixed geometry.

Travel: 160mm / 155mm

- HTA** Head Tube Angle (deg)
- STA** Seat Tube Angle (deg)
- STL** Seat Tube Length (mm)
- TTH** Top Tube Horizontal (mm)
- HTL** Head Tube Length (mm)
- RC** Rear Centre (mm)
- BBD** Bottom Bracket Drop (mm)
- SH** Standover Height (mm)
- WB** Wheelbase (mm)
- R** Reach (mm)
- S** Stack (mm)

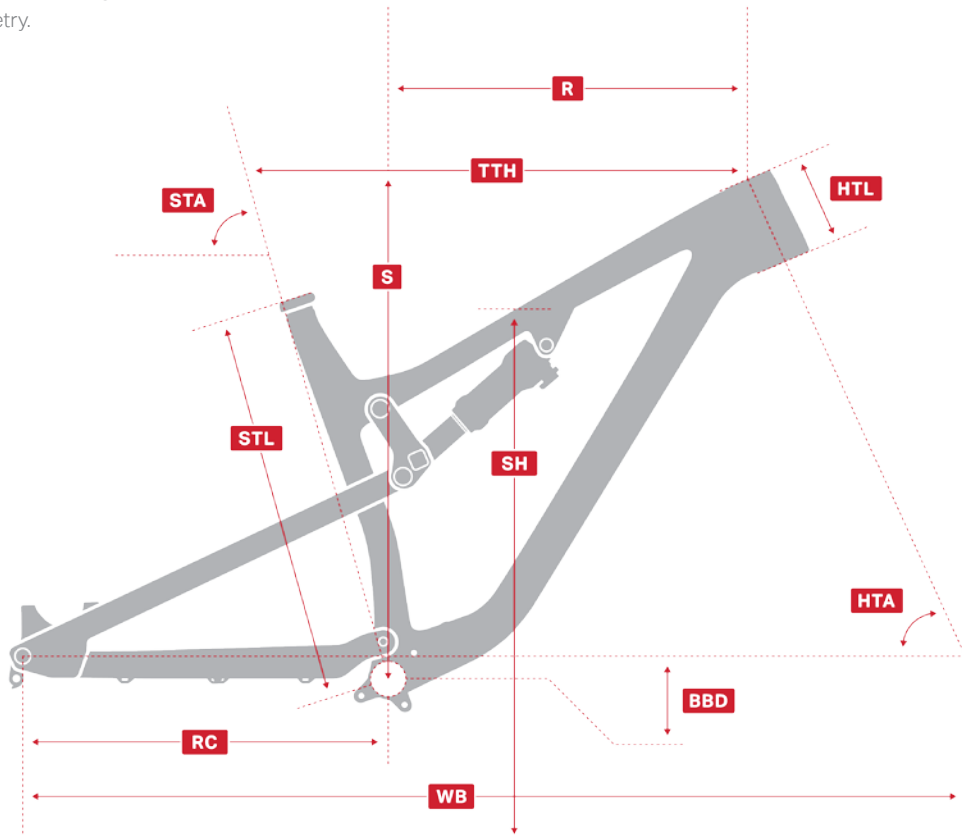

	SM	MD	LC	XL
HTA	65.9°	65.9°	65.9°	65.9°
STA	74.4°	74.4°	74.4°	74.4°
STL	392	432	470	508
TTH	577	602	627	657
HTL	95	100	110	120
RC	435	435	435	435
BBD	19	19	19	19
SH	834	829	828	827
WB	1161	1187	1213	1245
R	407	431	454	481
S	607	612	621	630