


CARBON & ALLOY GEOMETRY

Geometry shown for Slack, Neutral, and Steep RIDE-9™ positions.

Travel: 140mm / 140mm

- HTA** Head Tube Angle (deg)
- STA** Seat Tube Angle (deg)
- STL** Seat Tube Length (mm)
- TTH** Top Tube Horizontal (mm)
- HTL** Head Tube Length (mm)
- RC** Rear Centre (mm)
- BBD** Bottom Bracket Drop (mm)
- SH** Standover Height (mm)
- WB** Wheelbase (mm)
- R** Reach (mm)
- S** Stack (mm)

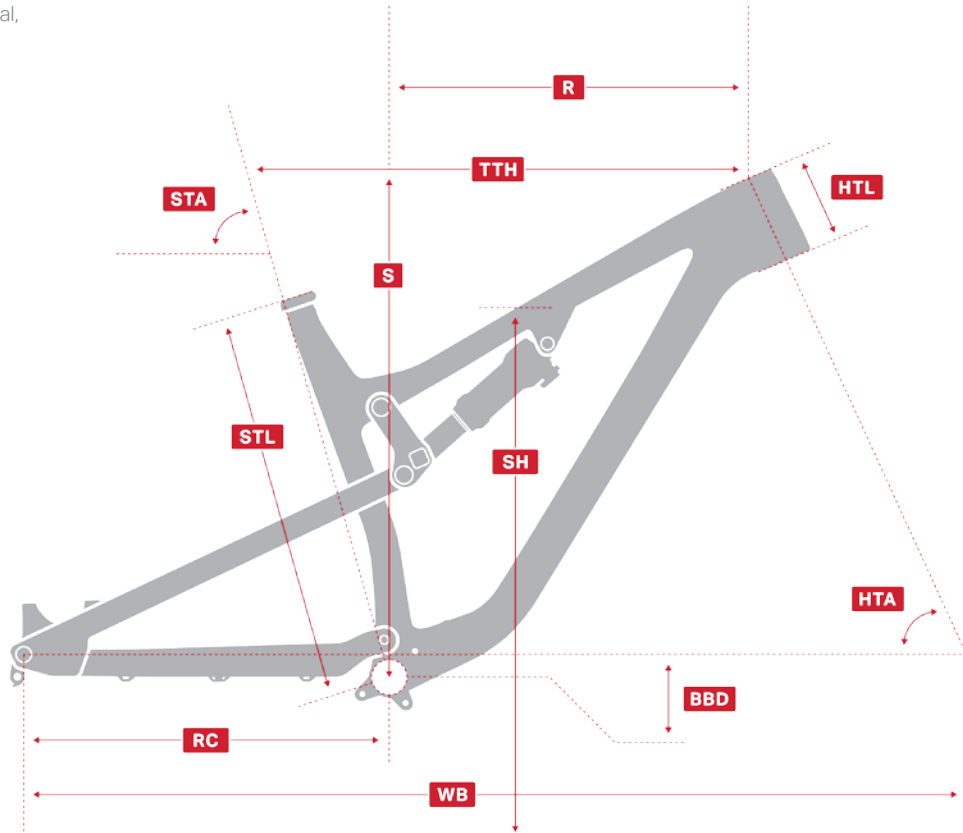

	SM			MD			LG			XL		
	Slack	Neutral	Steep	Slack	Neutral	Steep	Slack	Neutral	Steep	Slack	Neutral	Steep
HTA	65.5°	66°	66.6°	65.6°	66.1°	66.6°	65.6°	66.1°	66.6°	65.6°	66.1°	66.6°
STA	74°	74.5°	75.1°	74.1°	74.6°	75.1°	74.1°	74.6°	75.1°	74.1°	74.6°	75.1°
STL	392	392	392	432	432	432	470	470	470	508	508	508
TTH	578	576	575	603	601	600	628	626	625	658	656	655
HTL	95	95	95	100	100	100	110	110	110	120	120	120
RC	436	435	434	436	435	434	436	435	434	436	435	434
BBD	33	27	20	33	27	20	33	27	20	33	27	20
SH	813	814	816	808	810	812	806	809	811	805	807	810
WB	1158	1158	1157	1183	1183	1182	1210	1210	1209	1242	1242	1240
R	403	409	414	427	432	438	450	455	461	477	483	488
S	610	606	602	615	611	607	624	620	616	633	629	625