

# Jekyll 29 1



C21209M

<b>FRAME</b>	ALL-NEW Jekyll 29", 150mm travel, BallisTec Carbon front triangle, SmartForm C1 Alloy swingarm, Ai offset drivetrain, ISCG05, PF30, flat mount brake, tapered headtube
<b>FORK</b>	Fox Float Factory 36, 150mm, FIT Grip2 Damper, Kashima coating, 15x110, tapered steerer, 42mm offset
<b>REAR SHOCK</b>	Fox Float Factory DPX2 EVOL w/ Gemini dual mode air spring system (Flow Mode - 150mm / Hustle Mode - 120mm), remote-actuated, 3-Pos adj.
<b>RIMS</b>	Stan's NoTubes Flow MK3, 32h, tubeless ready
<b>HUBS</b>	SRAM 900 15x110 front, SRAM 900 12x148 rear w/ XD driver
<b>SPOKES</b>	DT Swiss Competition (Ai Offset dish - rear)
<b>TIRES</b>	Maxxis Minion DHF 29 x 2.5" WT front, DHR II 2.4" WT rear, 3C Compound, Max EXO puncture protection, tubeless ready
<b>PEDALS</b>	Not Included
<b>CRANK</b>	Truvativ Stylo 7K, 30T, Ai Custom
<b>BOTTOM BRACKET</b>	Cannondale Alloy PressFit30

<b>CHAIN</b>	SRAM X01 Eagle, 12-speed
<b>REAR COGS</b>	SRAM XG-1295, X01 Eagle, 10-50, 12-speed
<b>REAR DERAILLEUR</b>	SRAM X01 Eagle
<b>SHIFTERS</b>	SRAM X01 Eagle, 12-speed
<b>HANDLEBAR</b>	Cannondale C1 Riser, Carbon, 15mm rise, 9° sweep, 4° rise, 780mm
<b>GRIPS</b>	Cannondale Locking Grips
<b>STEM</b>	Cannondale C1, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0°, 35mm
<b>HEADSET</b>	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
<b>BRAKES</b>	SRAM Code RSC hydro disc, 200/180mm Centerline rotors
<b>BRAKE LEVERS</b>	SRAM Code RSC hydro disc
<b>SADDLE</b>	Fabric Scoop Shallow Elite, cro-mo rails
<b>SEATPOST</b>	Fox Transfer dropper, Kashima coating, internal routing, 31.6, 125mm (S), 150mm (M-XL)
<b>SIZES</b>	S, M, L, XL
<b>COLOR 1</b>	Sage Gray w/ Green Clay and Jet Black - Gloss (SGG)

# Jekyll 29 2



C21359M

<b>FRAME</b>	ALL-NEW Jekyll 29", 150mm travel, BallisTec Carbon front triangle, SmartForm C1 Alloy swingarm, Ai offset drivetrain, ISCG05, PF30, flat mount brake, tapered headtube
<b>FORK</b>	Fox Float Performance 36, 150mm, FIT4 Damper, 3-Pos adj., 15x110, tapered steerer, 42mm offset
<b>REAR SHOCK</b>	Fox Float Performance Elite DPX2 EVOL w/ Gemini dual mode air spring system (Flow Mode - 150mm / Hustle Mode - 120mm), remote-actuated, 3-Pos adj.
<b>RIMS</b>	Stan's NoTubes Flow MK3, 32h, tubeless ready
<b>HUBS</b>	Formula 15x110 front, SRAM 900 12x148 rear w/ XD driver
<b>SPOKES</b>	DT Swiss Champion (Ai Offset dish - rear)
<b>TIRES</b>	Maxxis Minion DHF 29 x 2.5" WT front, DHR II 2.4" WT rear, 3C Maxx Terra Compound, EXO puncture protection, tubeless ready
<b>PEDALS</b>	Not Included
<b>CRANK</b>	Truvativ Stylo 7K, 30T, Ai Custom
<b>BOTTOM BRACKET</b>	Cannondale Alloy PressFit30

<b>CHAIN</b>	SRAM GX Eagle, 12-speed
<b>REAR COGS</b>	SRAM XG-1275, GX Eagle, 10-50, 12-speed
<b>REAR DERAILLEUR</b>	SRAM X01 Eagle
<b>SHIFTERS</b>	SRAM GX Eagle, 12-speed
<b>HANDLEBAR</b>	Cannondale C3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
<b>GRIPS</b>	Cannondale Locking Grips
<b>STEM</b>	Cannondale C1, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0°, 35mm
<b>HEADSET</b>	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
<b>BRAKES</b>	Shimano XT 4-piston hydro disc, 203/180mm
<b>BRAKE LEVERS</b>	Shimano XT hydro disc
<b>SADDLE</b>	Fabric Scoop Shallow Elite, cro-mo rails
<b>SEATPOST</b>	Cannondale DownLow Dropper Post, internal routing, 31.6, 100mm (S), 125mm (M), 150mm (L-XL)
<b>SIZES</b>	S, M, L, XL
<b>COLOR 1</b>	Graphite w/ Jet Black and Charcoal - Gloss (GRA)

# Jekyll 29 3




C21409M

<b>FRAME</b>	ALL-NEW Jekyll 29", 150mm travel, BallisTec Carbon front triangle, SmartForm C1 Alloy swingarm, Ai offset drivetrain, ISCG05, PF30, flat mount brake, tapered headtube
<b>FORK</b>	Fox Float Performance 36, 150mm, Grip Damper, 3-Pos adj., 15x110, tapered steerer, 42mm offset
<b>REAR SHOCK</b>	Fox Float Performance DPS EVOL w/ Gemini dual mode air spring system (Flow Mode - 150mm / Hustle Mode - 120mm), remote-actuated, 3-Pos adj.
<b>RIMS</b>	Stan's NoTubes Flow S1, 32h, tubeless ready
<b>HUBS</b>	Formula 15x110 front, 12x148 rear w/ HG driver
<b>SPOKES</b>	DT Swiss Champion (Ai Offset dish - rear)
<b>TIRES</b>	Maxxis Minion DHF 29 x 2.5" WT front, DHR II 2.4" WT rear, Dual compound, EXO puncture protection, tubeless ready
<b>PEDALS</b>	Not Included
<b>CRANK</b>	Truvativ Stylo 6K, 30T, Ai Custom
<b>BOTTOM BRACKET</b>	Cannondale BB30

<b>CHAIN</b>	SRAM NX Eagle, 12-speed
<b>REAR COGS</b>	SRAM PG-1230, NX Eagle, 10-50, 12-speed
<b>REAR DERAILLEUR</b>	SRAM GX Eagle
<b>SHIFTERS</b>	SRAM GX Eagle, 12-speed
<b>HANDLEBAR</b>	Cannondale C3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
<b>GRIPS</b>	Cannondale Locking Grips
<b>STEM</b>	Cannondale C3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0°, 35mm
<b>HEADSET</b>	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
<b>BRAKES</b>	SRAM Guide R hydro disc, 200/180mm Centerline rotors
<b>BRAKE LEVERS</b>	SRAM Guide R hydro disc
<b>SADDLE</b>	Fabric Scoop Shallow Sport, steel rails
<b>SEATPOST</b>	TranzX dropper, internal routing, 31.6, 100mm (S), 125mm (M-XL)
<b>SIZES</b>	S, M, L, XL
<b>COLOR 1</b>	Volt w/ Meteor Gray and Black Pearl - Gloss (VLT)

# Jekyll 29 Geometry

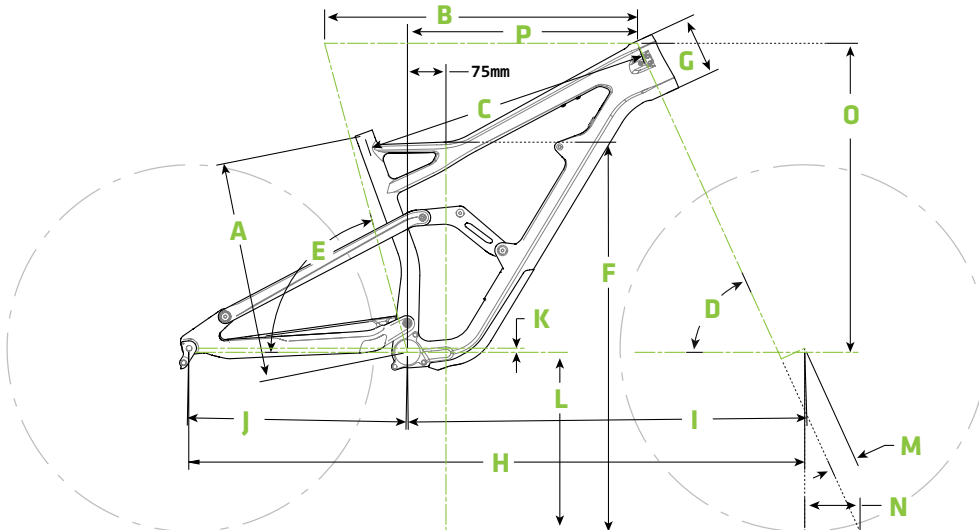

	S	M	L	XL
<b>A</b> SEATTUBE LENGTH (CM/IN)	40.0/15.7	43.0/16.9	46.0/18.1	52.0/20.5
<b>B</b> TOP TUBE HORIZONTAL (CM/IN)	58.6/23.1	61.1/24.0	63.6/25.0	66.4/26.1
<b>C</b> TOP TUBE ACTUAL (CM/IN)	56.8/22.4	58.9/23.2	61.3/24.1	64.1/25.2
<b>D</b> HEAD TUBE ANGLE	65.0°	*	*	*
<b>E</b> SEAT TUBE ANGLE	75.0°	*	*	*
<b>F</b> STANDOVER (CM)	76.0/29.9	76.6/30.2	77.6/30.5	78.8/31.0
<b>G</b> HEAD TUBE LENGTH (CM/IN)	10.2/4.0	11.5/4.5	12.7/5.0	14.0/5.5
<b>H</b> WHEELBASE (CM/IN)	118.9/46.8	121.6/47.9	124.3/48.9	127.3/50.1
<b>I</b> FRONT CENTER (CM/IN)	74.7/29.4	77.5/30.5	80.2/31.6	83.2/32.7
<b>J</b> CHAIN STAY LENGTH (CM/IN)	44.2/17.4	*	*	*
<b>K</b> BOTTOM BRACKET DROP (CM/IN)	1.6/0.6	*	*	*
<b>L</b> BOTTOM BRACKET HEIGHT (CM/IN)	36.0/14.2	*	*	*
<b>M</b> FORK RAKE (CM/IN)	4.2/1.7	*	*	*
<b>N</b> TRAIL (CM/IN)	12.0/4.7	*	*	*
<b>O</b> STACK (CM/IN)	59.5/23.4	60.6/23.9	61.7/24.3	62.9/24.8
<b>P</b> REACH (CM/IN)	41.9/16.5	44.1/17.4	46.3/18.2	48.8/19.2